




109 Kero Road, Carlstadt, NJ 07072
 Tel: 718-963-1111 Fax: 718-387-7941
 www.manhattandoor.com

PRODUCT DATA SHEET

FPC-5: Standard Particleboard Core Door (5-Ply)

SPECIFICATIONS

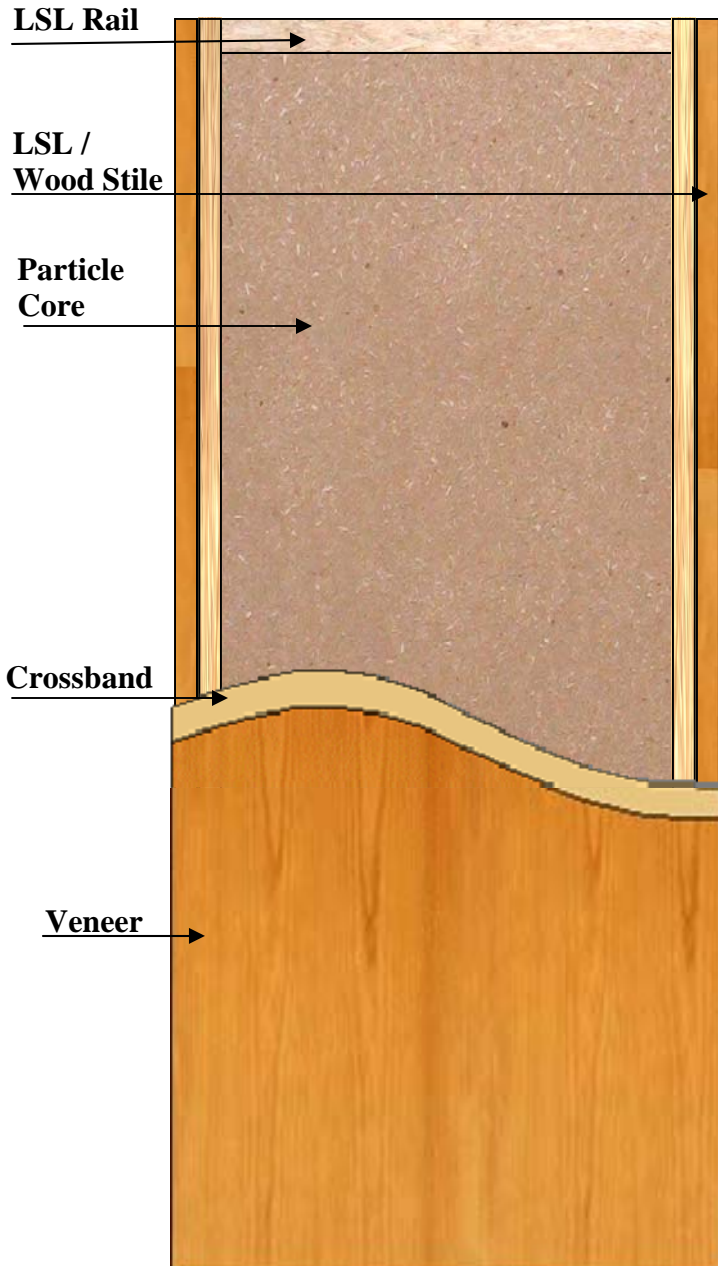

- Maximum Size:** 48" wide x 120" high, Pairs: 96" x 120"
 Larger doors (up to 60" x 144") for special use are also available. Call office for information.
- Transoms:** Call office for details.
- Thickness:** 1.375", 1.75", 2.0" and 2.25"
- Core:** Particleboard LD-1 or LD-2, which complies with ANSI A208.1
- Veneers:** Many species of natural wood veneer are available. WDMA 'A' grade, book & running match are standard. Primed Hardboard, Primed MDF, MDO and Decorative Plastic Laminate are also available.
- Stiles:** 1.25" softwood stiles are standard. Matching hardwood stiles with LSL backer (used for rigidity) are also available. All dimensions prior to factory trimming and prefitting.
- Rails:** 2.0" LSL rails are standard mill option. Hardwood available upon request. All dimensions prior to factory trimming and prefitting.
- Finish:** TR-6 UV clear, custom stain to match color, or primed where applicable.
- Adhesives:** PVA meets or exceeds WDMA I.S. I-A for Type I flush wood door adhesive.
- Lites:** Wood lip or flush moulding wood visions and metal vision frames with 1/4" glass (all types).
- Blocking:** Top rail, bottom rail, stiles and special blocking for special hardware is available.
- Machining:** Bevel, hinge and lock, mortise lock, card lock, pivot and other hardware preps using state of the art CNC equipment.
- Standards:** Meets WDMA I.S. I-A and AWI

Environmental / LEED Credit Contributions (Optional)

- MR 4: Recycled Content
- MR 5: Regional Materials
- MR 6: Rapidly Renewable Materials (Bamboo Veneer Only)
- MR 7: Certified Wood (FSC Pure, FSC % and FSC CW)
- IEQ 4.4: Low Emitting Materials / No Added Urea Formaldehyde