




109 Kero Road, Carlstadt, NJ 07072
 Tel: 718-963-1111 Fax: 718-387-7941
 www.ManhattanDoor.com

PRODUCT DATA SHEET

FPC-5: Standard Particleboard Core Door (5-Ply)

SPECIFICATIONS

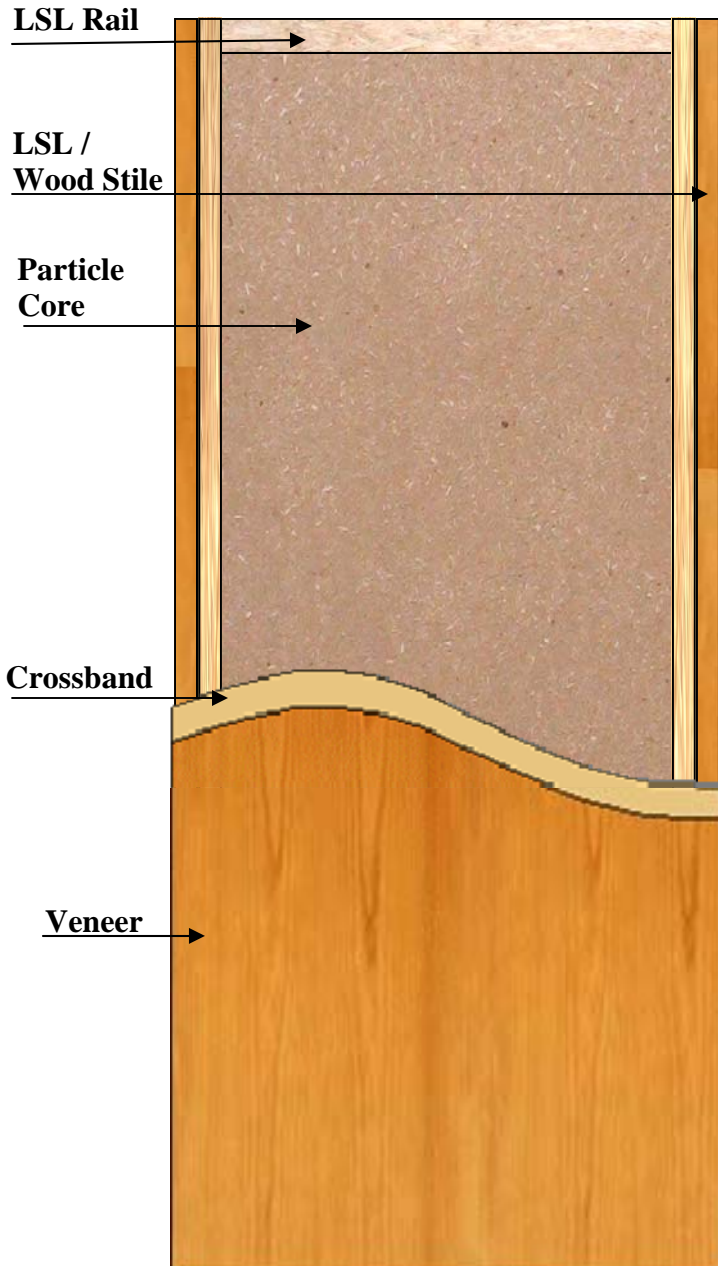

| | |
|---------------|---|
| Maximum Size: | 48" wide x 120" high, Pairs: 96" x 120" Larger doors (up to 60" x 144") for special use are also available. Call office for information. |
| Transoms: | Call office for details. |
| Thickness: | 1.375", 1.75", 2.0" and 2.25" |
| Core: | Particleboard LD-1 or LD-2, which complies with ANSI A208.1 |
| Veneers: | Many species of natural wood veneer are available. WDMA 'A' grade, book & running match are standard. Primed Hardboard, Primed MDF, MDO and Decorative Plastic Laminate are also available. |
| Stiles: | 1.25" softwood stiles are standard. Matching hardwood stiles with LSL backer (used for rigidity) are also available. All dimensions prior to factory trimming and prefitting. |
| Rails: | 1.25" LSL rails are standard mill option. Hardwood available upon request. All dimensions prior to factory trimming and prefitting. |
| Finish: | TR-6 UV clear, custom stain to match color, or primed where applicable. |
| Adhesives: | PVA meets or exceeds WDMA I.S. I-A for Type I flush wood door adhesive. |
| Lite | Wood lip or flush moulding wood visions and metal vision frames with 1/4" glass (all types). |
| Blocking: | Top rail, bottom rail, stiles and special blocking for special hardware is available. |
| Machining: | Bevel, hinge and lock, mortise lock, card lock, pivot and other hardware preps using state of the art CNC equipment. |
| Standards: | Meets WDMA I.S. I-A and AWI |

Environmental / LEED Credit Contributions (Optional)

- MR 4: Recycled Content
- MR 5: Regional Materials
- MR 6: Rapidly Renewable Materials (Bamboo Veneer Only)
- MR 7: Certified Wood (FSC Pure, FSC % and FSC CW)
- IEQ 4.4: Low Emitting Materials / No Added Urea Formaldehyde